
SERVICE INFORMATION



Over Centre Valve Setting PA52 PA53 PA59

These machines use a system employing a cam operated spool that switches the lift ram gland pipe between tank return and an accumulator.

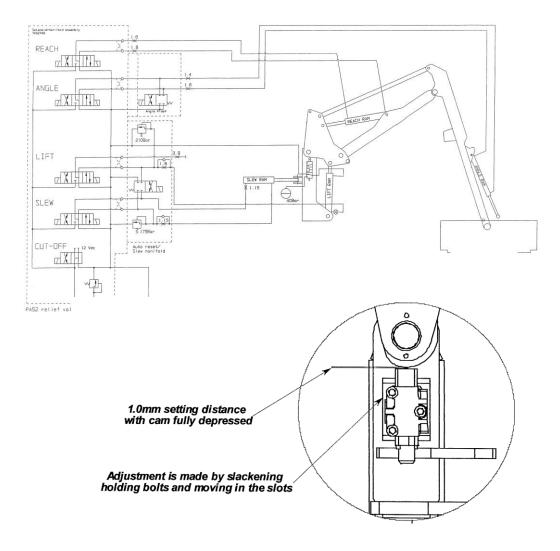

Setting procedure.

Set the cam in the fully depressed position, slacken the bolts holding the valve and move the valve up to the cam until the spool is fully depressed, then move the valve 1mm downwards away from the cam. Tighten the valve holding bolts.



VAT Registration Number: GB 133 8747 53