

# POWER ARM ATTACHMENTS

## CUTTERBAR

McConel offers a choice of Cutterbars for a fine finish in a wide range of different working environments.

### SWINGTRIM CUTTERBAR

#### Technical specification

- 1.2m or 1.5m working widths
- 20mm maximum cutting
- Minimum oil flow 12 ltrs/min
- Hard wearing teeth
- Easy to replace blades
- Weight: 40kg



#### SUITABILITY


Swingtrim

### CUTTERBAR SD

MHL 150, MHL 180, MHL 210

#### Technical specification

- 1.5m, 1.8m and 2.1m working widths
- 40mm maximum cutting
- Minimum oil flow 16-32 ltrs/min
- 200-400 cuts per minute
- Hard wearing teeth
- Easy to replace blades
- Weight: 60-68kg

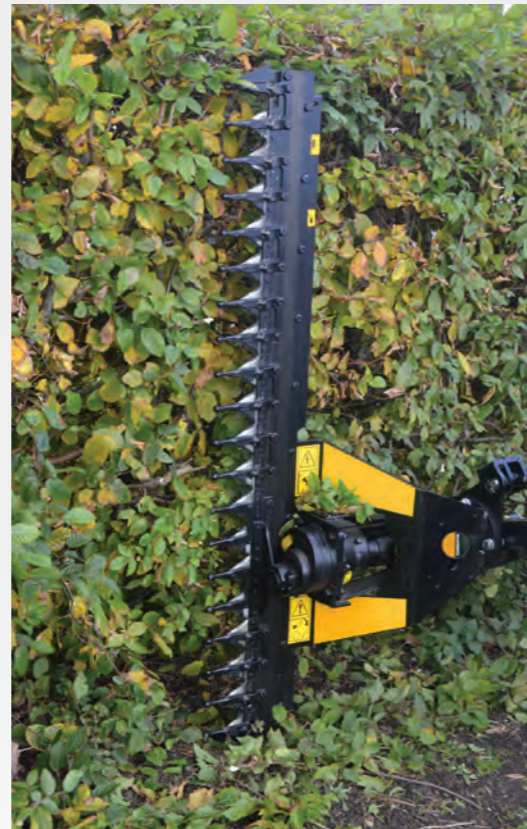

#### SUITABILITY

30-series  
45-series  
55-series  
60-series  
65-series  
70-series  
85-series  
Versi-series

### CUTTERBAR MD

MHS 200

#### Technical specification

- 2.0m working width
- 45mm maximum cutting
- Minimum oil flow 45 ltrs/min
- 60 cuts per minute
- Hard wearing teeth
- Easy to replace blades
- Weight: 130kg



#### SUITABILITY

45-series  
55-series  
60-series  
65-series  
70-series  
85-series  
Versi-series

### CUTTERBAR HD

MHX 170, MHX 230, MHX 270

#### Technical specification

- 1.7m, 2.3m and 2.7m working widths
- 110mm maximum cutting
- Minimum oil flow 45 ltrs/min
- 60 cuts per minute
- Hard wearing, Hardox teeth
- Easy to replace blades
- Weight: 170-250kg



#### SUITABILITY

45-series\*  
55-series  
60-series  
65-series  
70-series  
85-series  
Versi-series

\*MHX 170 Only